



Wilo-Sub TWI 5-3.. - 5..

Dimensioneringsdiagram

TWI 5 3..

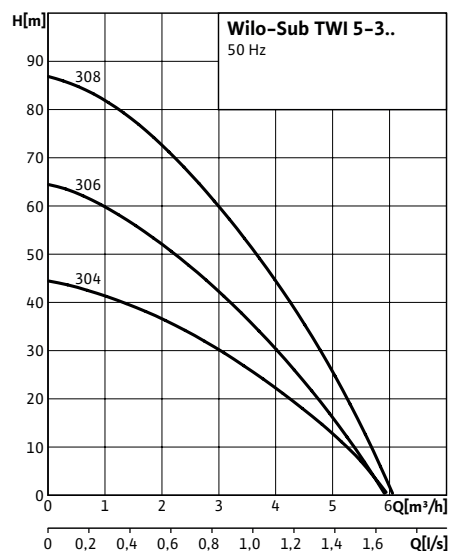

TWI 5 5..

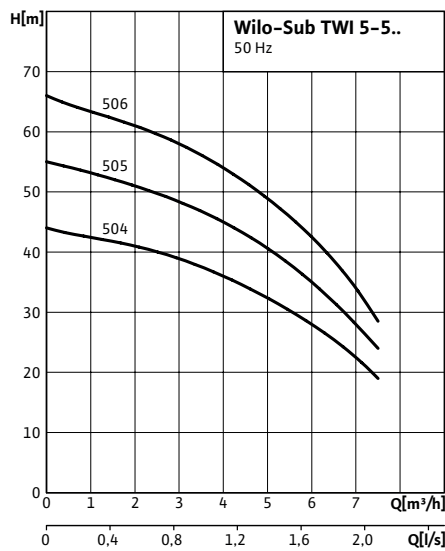

Tillbehör

Montage

	Art.nr.	RSK
Trycktank WVA 8 l	2519125	595 50 85
Trycktank 25 l, horisontell	2835528	595 05 52
Trycktank 60 l, horisontell	2835529	595 05 53
Trycktank 60 l, vertikal	2835534	595 05 54
Filter med flytkropp	2024961	
Slang 1,5 m (för sugfilter)	2025973	


Automatik

	Art.nr.	RSK
Tryckströmbrytare	2835530	595 50 82
Flödeskontroll EK	4084035	595 50 72
Motorskåp KMS 1-5 A	2835149	595 50 81
Nivåvippa WA 65	503211390	600 86 09

Övriga pumpdata

Mediatemperatur	+5°C - +40°C
Max drifttryck	10 bar
Kapslingsklass	IP 68
Isolationsklass	F
Doppdjup	Max 20 m

Måttuppgifter

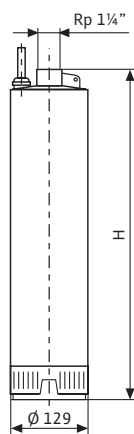

Pumpbeteckning	H	
	1~230 V	3~400 V
TWI 5-304	480	-
TWI 5-306	528	528
TWI 5-308	576	576
TWI 5-504	480	-
TWI 5-505	504	-
TWI 5-506	528	-

Motordata, vikt, artikel- och RSK-nummer

Pumpbeteckning	Art.nr	RSK	Märkeffekt P ₂ (kW)	Tillförd effekt P ₁ (kW)	Märkström 1~230 V (A)	Märkström 3~400 V (A)	Vikt (kg)
TWI 5-304 EM	4104118	588 45 24	0,55	0,85	4,5	-	15,0
TWI 5-304 EM -FS	4144935	588 49 99	0,55	0,85	4,5	-	15,3
TWI 5-306 EM	4104119	588 45 25	0,75	1,2	5,6	-	17,3
TWI 5-306 EM -FS	4144937	588 50 07	0,75	1,2	5,6	-	17,5
TWI 5-306 DM	4104123	588 43 91	0,75	1,2	-	2,3	17,3
TWI 5-308 EM	4104120	588 45 26	1,1	1,45	7,2	-	19,5
TWI 5-308 EM -FS	4144939	588 50 08	1,1	1,45	7,2	-	19,8
TWI 5-308 DM	4104124	588 43 92	1,1	1,45	-	2,7	19,5
TWI 5-504 EM	4144950	588 49 96	0,75	1,15	5,2	-	15,5
TWI 5-504 EM -FS	4144940	588 50 13	0,75	1,15	5,2	-	15,8
TWI 5-505 EM	4144951	588 49 97	0,9	1,4	6,5	-	18,5
TWI 5-505 EM -FS	4144941	588 50 14	0,9	1,4	6,5	-	18,8
TWI 5-506 EM	4144952	588 49 98	1,1	1,7	7,9	-	18,8
TWI 5-506 EM -FS	4144942	588 50 15	1,1	1,7	7,9	-	19,0