


JP / JP PM JP PT-V / JP PT-H



Further product documentation
net.grundfos.com/qr/i/99520338

be
think
innovate

GRUNDFOS 



Min./Max. 0/40 °C (S3: 60 °C)
Min./Max. 32/104 °F (S3: 140 °F)



$P_{\max} = 6 \text{ bar (87 psi)}$




• Voltage [V] • Connection:
• Frequency [Hz] GAS / NPT

Min./Max. 0/40 °C (S3: 55 °C)
Min./Max. 32/104 °F (S3: 131 °F)







JP

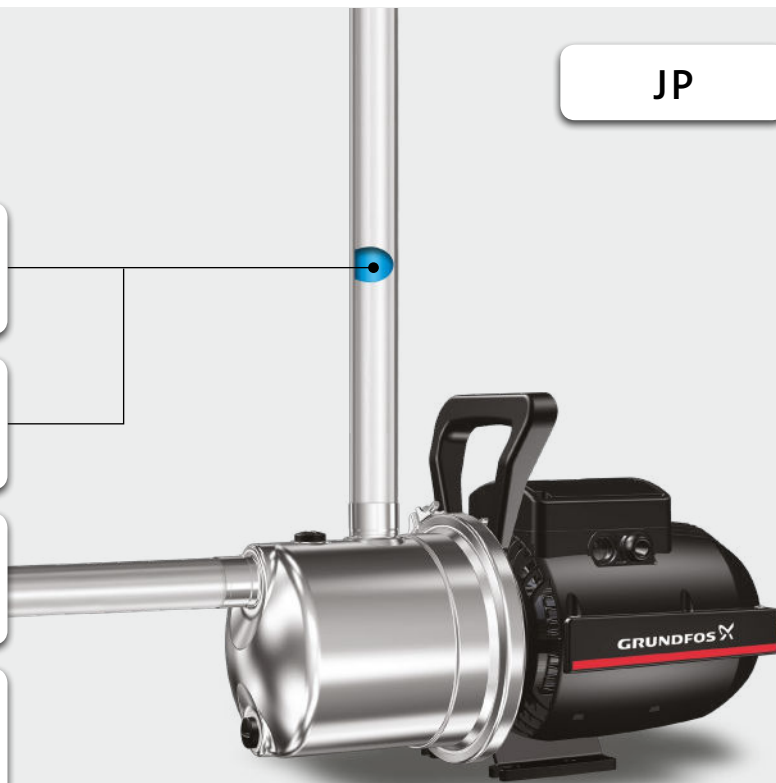


JP

Max. 8 m / 26 ft

$\geq 0.5 \text{ m} / 1.64 \text{ ft}$





Min./Max. 0/40 °C (S3: 60 °C)
Min./Max. 32/104 °F (S3: 140 °F)



$P_{\max} = 6 \text{ bar (87 psi)}$



- Voltage [V]
- Frequency [Hz]
- Connection: GAS / NPT


Min./Max. 0/40 °C (S3: 55 °C)
Min./Max. 32/104 °F (S3: 131 °F)



JP PM



$P_{\text{start}} = 1.5 \text{ bar (22 psi)}$

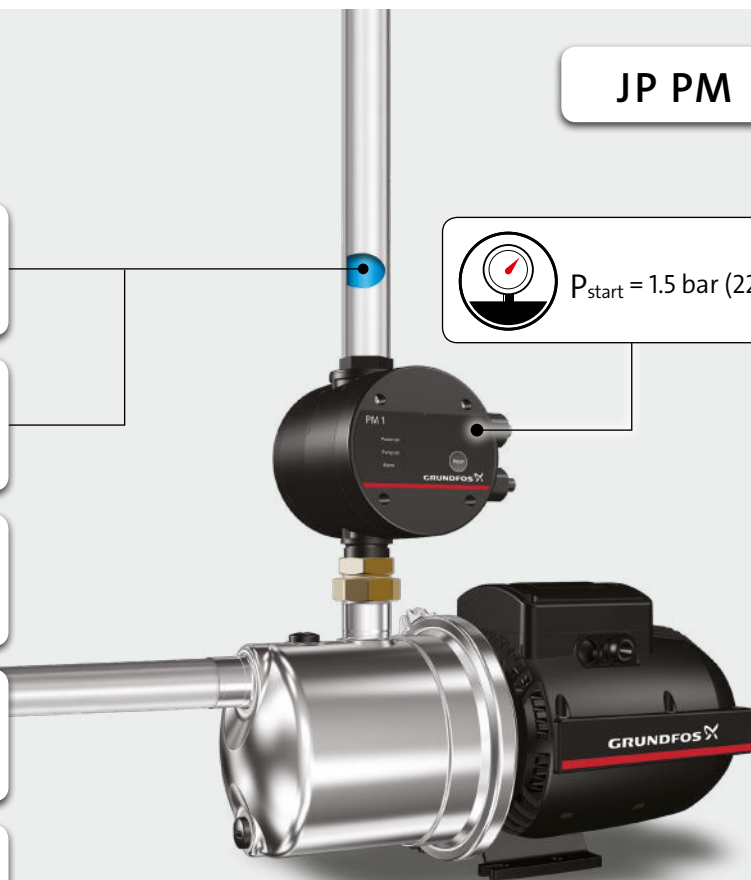


JP PM

Max. 10 m

Max. 8 m / 26 ft

$\geq 0.5 \text{ m} / 1.64 \text{ ft}$

The diagram illustrates the correct installation of a Grundfos JP PM pump. It shows a cross-section of a building with a basement and a crawlspace. The pump is located in the basement, connected to a vertical discharge pipe that extends into the crawlspace. A horizontal pipe runs along the top of the wall in the crawlspace, with a vertical riser pipe connecting it to the pump's discharge. A green checkmark is placed next to this riser pipe. Another green checkmark is placed next to a vertical pipe that is correctly installed, reaching down into the crawlspace. A third checkmark is placed next to a vertical pipe that is incorrectly installed, not reaching down into the crawlspace. A dimension line indicates a maximum height of 10 meters for the vertical pipe from the pump to the crawlspace. Another dimension line indicates a maximum height of 8 meters (26 feet) for the vertical pipe from the pump to the crawlspace. A third dimension line indicates a minimum height of 0.5 meters (1.64 feet) for the vertical pipe from the pump to the crawlspace. A schematic symbol for a pump is shown next to the vertical pipe. A black cable connects the pump to a wall switch labeled '0/Off' and '1/On'.



Min./Max. 0/40 °C (S3: 60 °C)
Min./Max. 32/104 °F (S3: 140 °F)



$P_{\max} = 6 \text{ bar (87 psi)}$




- Voltage [V]
- Frequency [Hz]
- Connection: GAS

Min./Max. 0/40 °C (S3: 55 °C)
Min./Max. 32/104 °F (S3: 131 °F)



JP PT-V

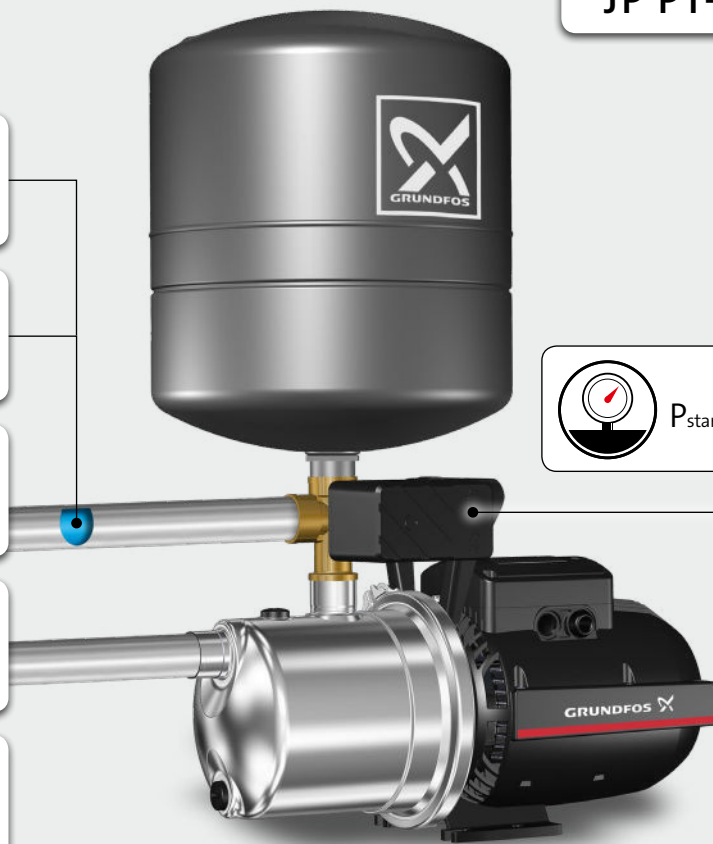


$P_{\text{start}} = 2.2 \text{ bar}$


JP PT-V

(32 psi)

Max. 8 m / 26 ft

$\geq 0.5 \text{ m} / 1.64 \text{ ft}$

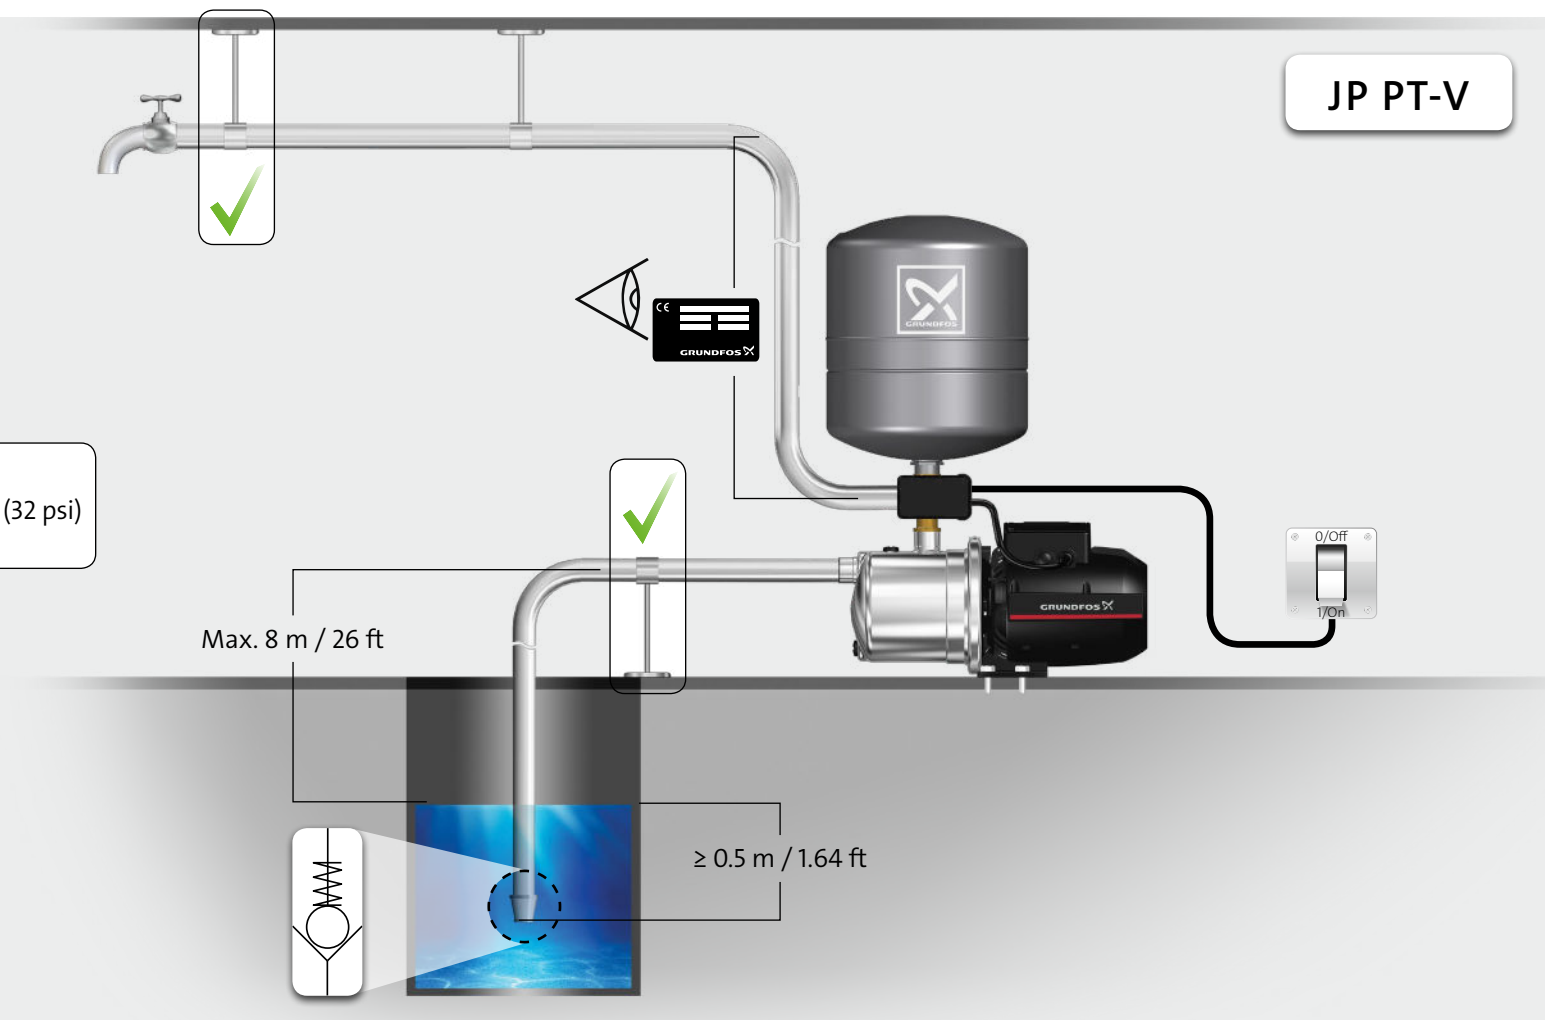



Min./Max. 0/40 °C (S3: 60 °C)
Min./Max. 32/104 °F (S3: 140 °F)



$P_{\max} = 6 \text{ bar (87 psi)}$



- Voltage [V]
- Frequency [Hz]
- Connection: GAS


Min./Max. 0/40 °C (S3: 55 °C)
Min./Max. 32/104 °F (S3: 131 °F)




JP PT-H



$P_{\text{start}} = 2.2 \text{ bar}$

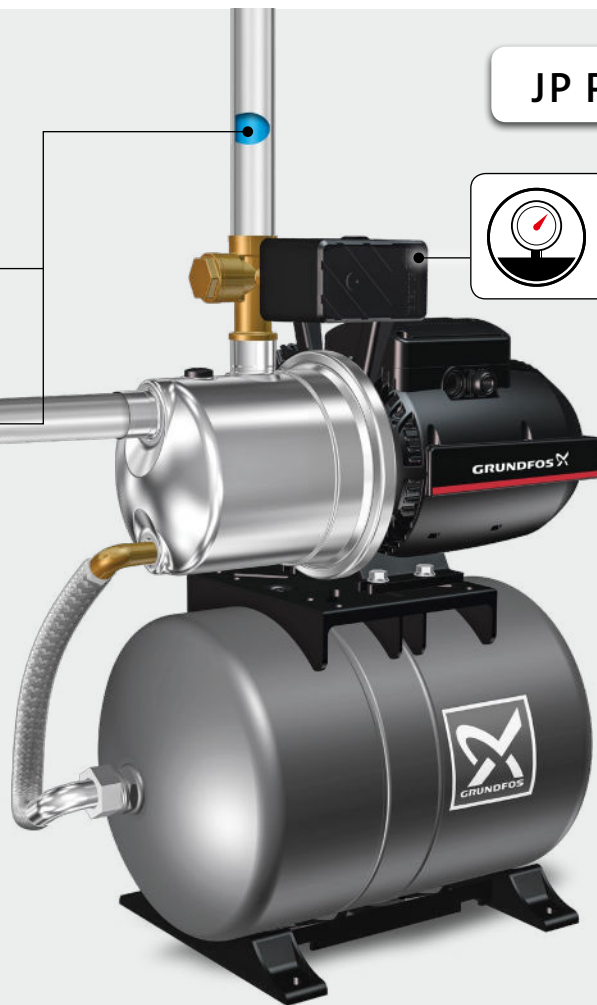



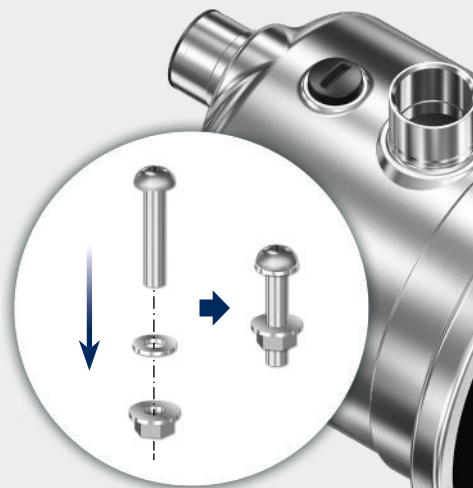


JP



1A



JP / JP PM/ JP

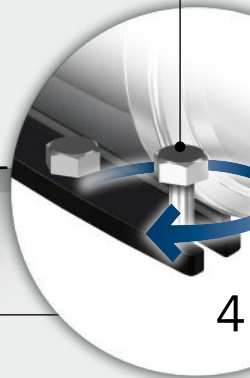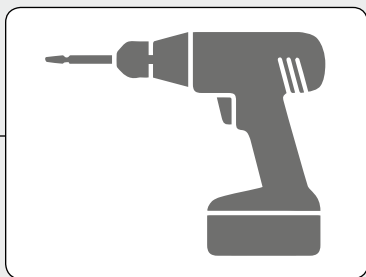

PT-V



1B

JP PT-H


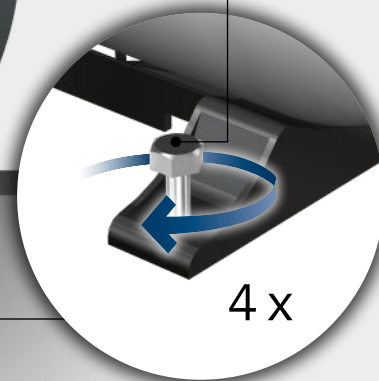





2a







JP






2b




JP PM

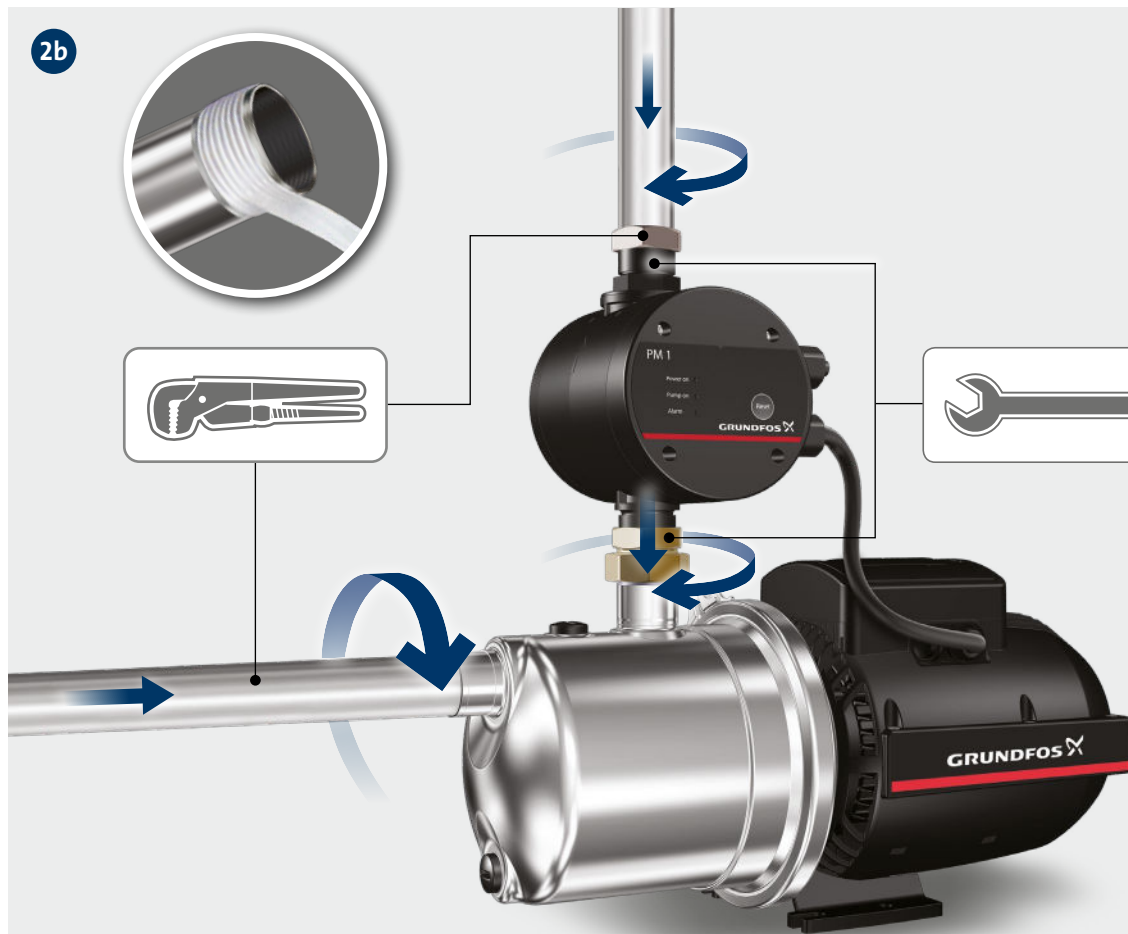

2c


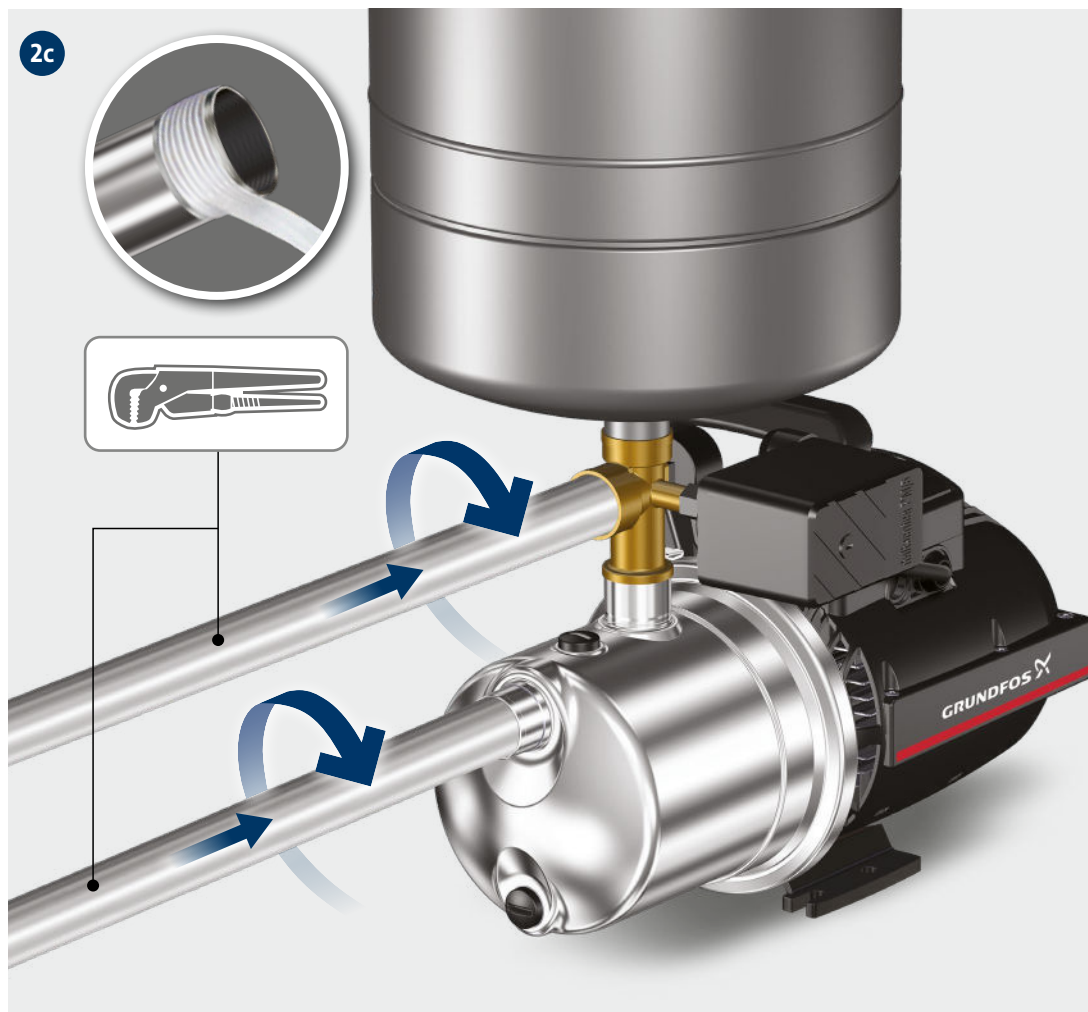




JP PT-V



2d

JP PT-H

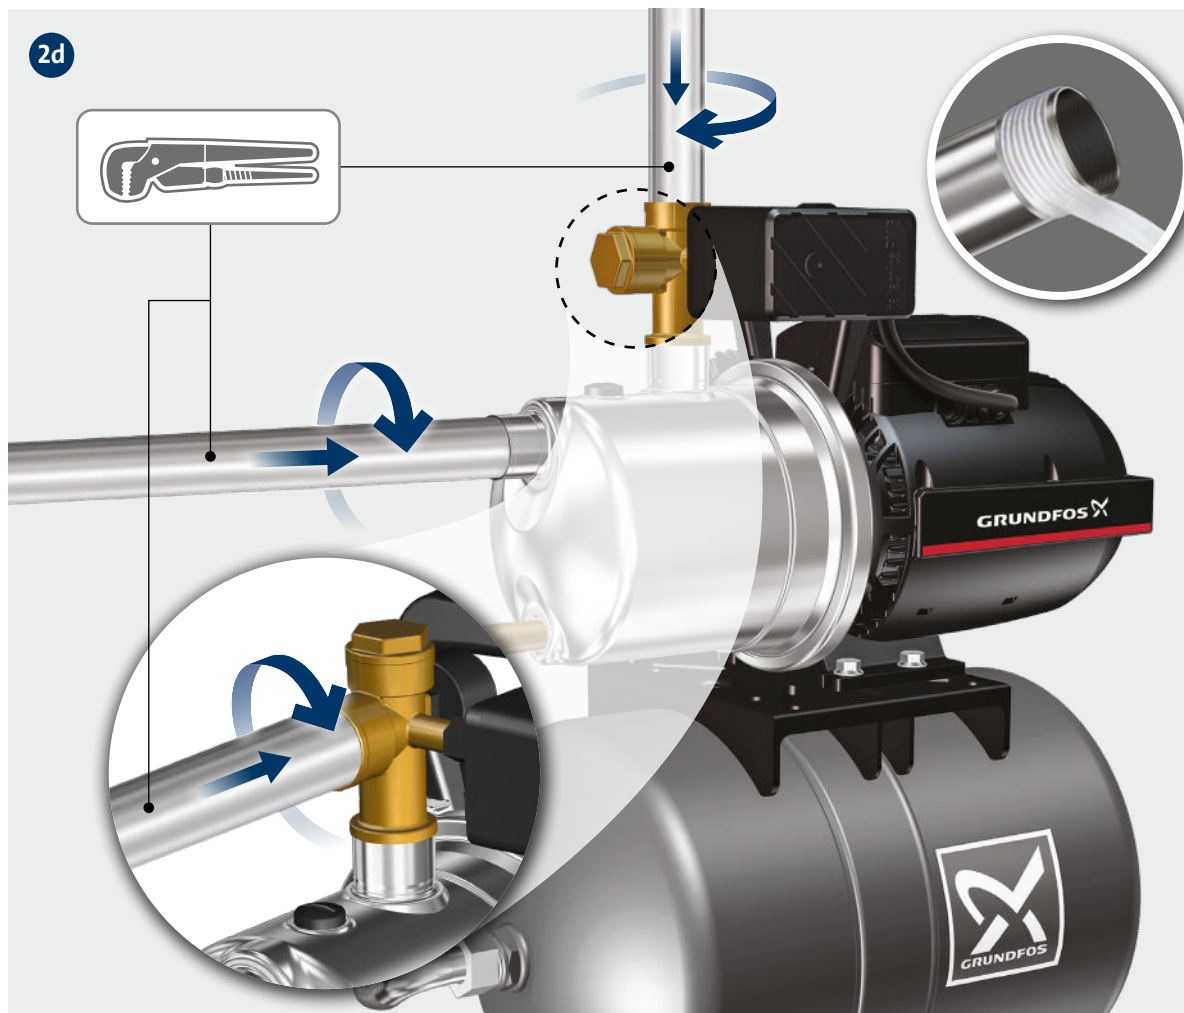




3


JP / JP PM / JP PT-V / JP PT-H



4

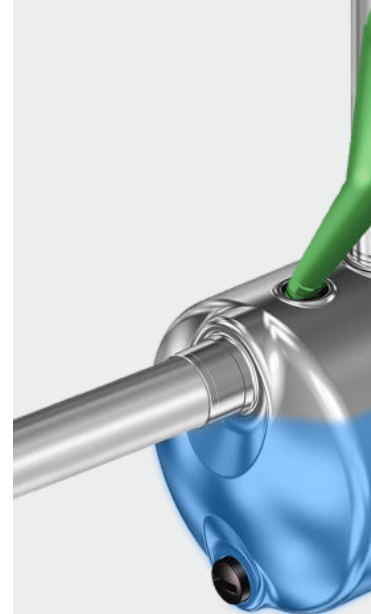



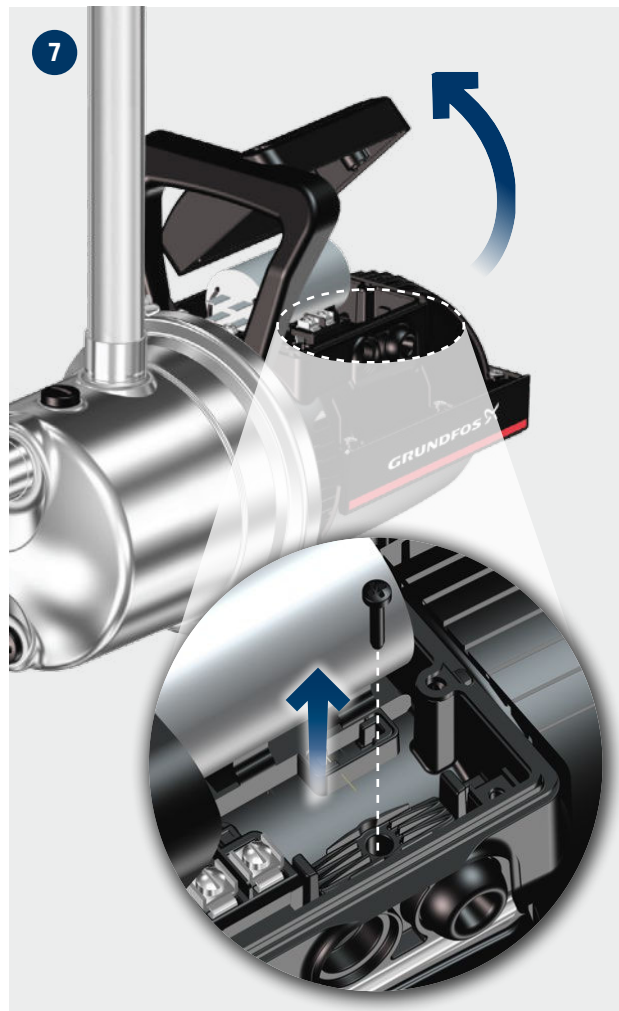


JP / JP PM / JP PT-V / JP PT-H



9



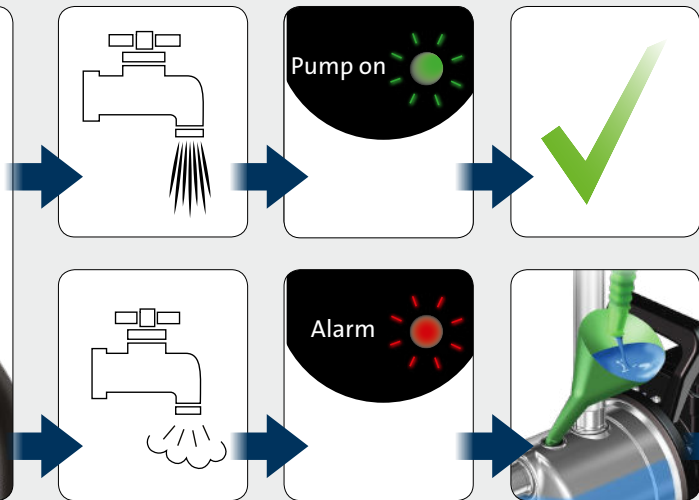

JP PM

Reset



net.grundfos.com/qr/i/99520338



JP / JP PM / JP PT-V / JP PT-H



be think innovate

Installation date: _____

Installer:

99544277 1218

ECM: 1249679

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 

Trademarks displayed in this material, including but not limited to Grundfos, the Grundfos logo and "be think innovate" are registered trademarks owned by The Grundfos Group. All rights reserved.
© 2018 Grundfos Holding A/S, all rights reserved.