
ATU 001

Table of Contents

ATU 001 Installation.....2

ATU 001 Installation.....2

Diagram illustrating the RIA0001 rev 1.02 module, which is 100 mm wide and 100 mm high. The module features three battery compartments labeled BATT1, BATT2, and BATT3, each accepting a 1.5 V AA LR6 battery. The module is rated IP 54 and operates at -20°C to +50°C. It also shows the ATU 001 terminal block with connections for +12-24 V DC, 230 V AC, and 110 V AC. A warning symbol is present next to the AC voltage options.

The diagram illustrates the wiring for the ATU 001 unit. On the left, a terminal block with terminals 9, 10, and 11 is shown. Terminal 9 is connected to the positive (+) terminal of the power supply. Terminal 10 is connected to the negative (-) terminal of the power supply. Terminal 11 is connected to the positive (+) terminal of the power supply. The power supply is represented by a battery symbol with a warning triangle and the text '+ 12-24 V DC' and '230 V AC 110 V AC' crossed out. To the right of the power supply, three 1.5V battery symbols are shown. The ATU 001 unit is shown on the right, with terminals 12 through 20. Terminal 12 is connected to the positive (+) terminal of the power supply. Terminal 13 is connected to the negative (-) terminal of the power supply. Terminal 14 is connected to the positive (+) terminal of the power supply. Terminal 15 is connected to the negative (-) terminal of the power supply. Terminal 16 is connected to the positive (+) terminal of the power supply. Terminal 17 is connected to the negative (-) terminal of the power supply. Terminal 18 is connected to the positive (+) terminal of the power supply. Terminal 19 is connected to the negative (-) terminal of the power supply. Terminal 20 is connected to the positive (+) terminal of the power supply. The ATU 001 unit also features three battery slots labeled BATT1, BATT2, and BATT3, and a label 'RIA0001 rev 1.02'.

2

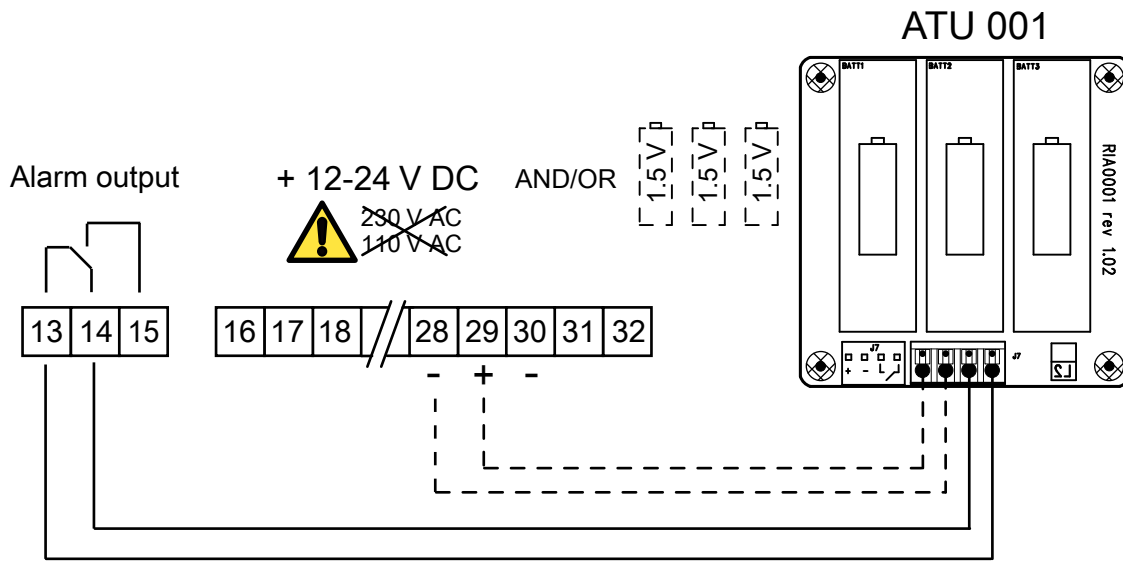


Figure 3: FGC 300

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots
- 2) A leading global water technology company

We're 12,000 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to xyleminc.com



Xylem Water Solutions AB
Gesällvägen 33
174 87 Sundbyberg
Sweden
Tel. +46-8-475 60 00
Fax +46-8-475 69 00
<http://tpi.xyleminc.com>

Visit our Web site for the latest version of this document and more information

The original instruction is in English. All non-English instructions are translations of the original instruction.

© 2011 Xylem Inc

899725_4.1_en.US_IOM_ATU001